

11/08/99

HAVERSTOCK & OWENS LLP
260 Sheridan Avenue, Suite 420
Palo Alto, California 94306
(650) 833-0160

Attorney Docket No : ICOM-00600

BOX NEW PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of Inventor: Carl P. Daniel

Title: SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A REMOTE RECEIVER

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date, November 8, 1999, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL454480972US addressed to: **PATENT APPLICATION**, Assistant Commissioner for Patents, Washington, D.C. 20231.

Nancy Affleck
(Name of Person Mailing Paper)

Nancy Affleck
Signature

Enclosed are:

1. The papers required for filing date under CFR § 1.53(b):

24 Pages of Specification (including claims); 2 Sheet(s) of Drawings
Formal
X Informal
X Declaration or Oath (unexecuted; combined with Power of Attorney)
X Power of Attorney (unexecuted; combined with Declaration)
Assignment of the Invention to IntraCom Corporation (including Form PTO-1595)

Fee Calculation

Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee
				\$760.00
Total Claims	35 - 20 =	15	\$18.00	270.00
Independent Claims	4 - 3 =	1	\$78.00	78.00
Multiple Dependent claim(s), if any			\$260.00	0.00
			Filing Fee Calculation	\$1,108.00

6. X Verified Statement (Declaration) Claiming Small Entity Status (unexecuted)

50% Filing Fee Reduction (if applicable)

\$554.00

7. Other Fees

Assignment Recordation Fee

Other

0.00

TOTAL FEES ENCLOSED

\$554.00

8. Payment of Fees

X Check in the amount of \$554.00 enclosed.9. X Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No 08-1275. An originally executed duplicate of this transmittal is enclosed for this purpose.

10. Information Disclosure Statement

11. X Return Receipt PostcardDated: November 8, 1999

By *Jonathan O. Owens*
Name: Jonathan O. Owens
Registration No.: 37,902

JC488 U.S. PTO
09/436432
11/08/99

Applicant Or Patentee: Carl P. Daniel
 Serial or Patent No.:
 Filed or Issued: herewith
 Entitled: **SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A
 REMOTE RECEIVER**

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
 STATUS (37 CFR § 1.9(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am

 the owner of the small business concern identified below:
 X an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Concern: **IntraCom Corporation**
 Address of Concern: **1320 Harbor Bay Parkway, Suite 240
 Alameda, CA 94502**

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR §§ 121.3-18, and reproduced in 37 CFR § 1.9(d), for purposes of paying reduced fees under Sections 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled **SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A REMOTE RECEIVER** by inventor(s) Carl P. Daniel as described in:

 X the specification filed herewith
 Application Serial No. , filed
 Patent No. , issued

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR § 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR § 1.9(d) or a nonprofit organization under 37 CFR § 1.9(e).

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR § 1.27)

Full Name: _____
 Address: _____
 [] Individual [] Small Business Concern [] Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR § 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing: _____

Title in Organization: _____

Address of Person Signing: IntraCom Corporation, 1320 Harbor Bay Parkway, Suite 240, Alameda, CA 94502

Dated. _____

Signature: _____

PATENT
ICOM-00600**SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A
COMPUTER NETWORK TO A REMOTE RECEIVER****FIELD OF THE INVENTION:**

5 The present invention relates to the field of communications systems. More particularly, the present invention relates to the field of video communications systems transmitting video data from a source device to a receiving device.

BACKGROUND OF THE INVENTION:

10 In the last decade, there have been tremendous advances in medical devices which have greatly improved the ability to diagnose and treat patients. Ultrasounds, sonograms and echocardiograms are just a few modern tools developed to accurately diagnose patients with coronary problems, kidney stones, tumors, and other diseases without conducting risky and expensive exploratory surgeries. These tools are especially useful because they have the capability of being more accurate than exploratory surgeries and do not pose an additional risk to patients.

15 Given the benefits of ultrasounds, sonograms and echocardiograms these tools are in widespread use in many hospitals, clinics, testing facilities, and individual doctors' offices. Many doctors primarily base their diagnosis on the results from ultrasounds, sonograms and echocardiograms. While these tools allow doctors to make their diagnosis without costly, risky, and time consuming exploratory surgeries, an error in administering an ultrasound, sonogram and echocardiogram can lead to a wrong diagnosis. A wrong diagnosis can be catastrophic for the patient. By receiving an incorrect diagnosis, the patient can potentially fail to receive needed medical treatment and/or be unnecessarily treated. Whether needed medical treatment is withheld or unnecessary medical treatment is given due to an erroneous test result from an ultrasound, sonogram and echocardiogram, the patient unnecessarily suffers.

20

25

The doctor is generally not at the test when the study is performed on the patient. The tests are typically performed and later reviewed by the doctor after the patient has left the technician's office. The test is recorded in a video or movie format and then later played by the doctor to make their diagnosis.

5 A video picture or frame is made up of a number of horizontal lines included within the video display. To display a video picture or frame the video system begins at the top of the screen and displays the information within the composite video signal one horizontal line at a time. The information for each horizontal line is contained within a horizontal period of the composite video signal. After each horizontal period, the video system moves to the next
10 line and displays the information within the next horizontal period of the composite video system. This continues until the video system reaches the bottom line on the video display. After displaying the video information on the bottom line of the video display, the video system must reset itself to the top of the display in order to begin displaying the next frame. In order to allow the system to reset itself to the top of the video display a vertical blanking
15 period is included within the composite video signal, after the video information for each frame. This vertical blanking period allows the video system to reset to the top of the video display and begin displaying the information for the horizontal lines of the next frame. Therefore, a number of horizontal periods, enough to comprise a frame or screen, are strung together, within the composite video signal. Between each frame, the composite video signal
20 includes a vertical blanking period which allows the video system to perform a vertical reset and prepare to display the next frame by moving back up to the top of the video display.

A schematic block diagram of a typical configuration including a display device 10 and an external image source 12 coupled together through a network 14 is illustrated in Figure 1. The network 14 can be an intranet connection, internet connection or a direct
25 connection between the display device 10 and the external image source 12. A user can view a movie or stream of video frames at the display device 10 which is transmitted from the source device 12. Currently, such a video stream can be transmitted from the source device 12 to the display device 10 in a number of ways. In order to view a movie transmitted from

the source device 12, at the display device 10, in typical systems, the entire video stream of frames within the movie is transmitted and stored at the display device 10 and then viewed by the user. This method has the disadvantage that it can be very time consuming, because it requires that the entire movie is sent to the display device 10, before viewing of the movie can begin at the display device 10. Depending on the size of the movie and the speed of the connection between the display device 10 and the source device 12, this can be a significant delay from the time the video stream is transmitted until the user can start watching the movie at the display device 10.

In another prior system, frames of the movie are sent interactively as the movie was recorded. This has the disadvantage of requiring the movie to be transmitted in the format in which it was recorded. This format may not be suitable for efficient transmission. This system also has the disadvantage that the movie is not stored at the display device 10 and must be re-transmitted for each viewing.

In still another prior system, frames of the movie are interactively transcoded to a storage-efficient encoding format either before transmission or as the frames are being transmitted. This system has the disadvantage of not allowing the viewer to see frames of the movie as originally recorded. Depending on the encoding format used, a user of such a system may notice a significant decrease in image quality. This system also has the disadvantage that the movie is not stored at the display device and must be re-transmitted for each viewing.

SUMMARY OF THE INVENTION:

A method of and apparatus for transmitting video images allows a viewer to receive at a receiving display device, all or a selected portion of a video stream of frames, in a storage-efficient format from a transmitting device and view the received video stream of frames before the transmission is complete. The video system also allows a viewer to receive at the receiving device, all or a selected portion of a video stream of frames, in a high-resolution format, by marking sections of interest within the received stream of frames in the storage-

efficient format and requesting enhancement of those marked sections of interest. This apparatus preferably includes a source device, a transmitting device and at least one receiving device. Preferably, the transmitting device and the receiving device communicate over a network such as the Internet Protocol network. Alternatively, the transmitting device and the receiving device communicate over any appropriate data network. The transmitting device transmits the video images to the receiving device for display and storage at the receiving device. The receiving device is also capable of communicating with the transmitting device while simultaneously receiving video images. The source device is preferably a medical test device such as an ultrasound, a sonogram, an echocardiogram, and the like. Alternatively, the source device can be any video capture or storage device capable of sourcing a stream of video frames.

In one aspect of the present invention, a method of transmitting a video stream of images from a source device to a receiving device includes the steps of transmitting the video stream of images in a first format to the receiving device, receiving a request for an enhanced version of a marked portion of the video stream of images from the receiving device and transmitting the marked portion of the video stream of images in a second format, wherein the second format represents an enhanced version of the first format. The method further includes the step of storing the original video stream of images at the receiving device. The method further includes the step of storing the marked portion of the video stream of images to replace a corresponding portion of the original video stream of images. The method further includes the step of generating the video stream of images and transmitting the video stream of images to the source device. Preferably, the step of generating is performed by a medical test device which is one of the group of an ultrasound, sonogram and echocardiogram device. The method further includes the step of displaying the video stream of images at the receiving device. The method further includes the step of marking the marked portion of the video stream of images at the receiving device. The step of displaying includes a fast-forward and rewind function. The step of transmitting the video stream of images and the step of displaying are performed simultaneously such that a received portion of the video stream of

images is displayed while a remaining portion of the video stream of images is transmitted. The method further includes the step of adding annotations to the video stream of images. The method further includes the step of determining if a user views a particular image within the video stream of images for a predetermined period of time and automatically transmitting the particular image in the second format. If the request for an enhanced version is received while the step of transmitting the video stream of images is being performed, then the step of transmitting the video stream of images is paused while the step of transmitting the marked portion is performed, and resumed once the step of transmitting the marked portion is completed.

In another aspect of the present invention, a transmitting device for transmitting a video stream of images to a receiving device includes a storage device configured for receiving and storing a stream of images and a controller coupled to the storage device and configured for coupling to the receiving device for controlling transmission of the stream of images from the storage device to the receiving device, wherein the stream of images are transmitted to the receiving device in a first format and then a requested portion of the stream of images are transmitted to the receiving device in a second format, and further wherein the second format represents an enhanced version of the first format. The transmitting device further includes a source device coupled to the storage device for generating the stream of images and transmitting the stream of images to the storage device. The source device is preferably a medical test device which is one of an ultrasound, a sonogram and an echocardiogram. The transmitting device further includes a network interface circuit coupled to the storage device and to the controller for communicating with the receiving device over a network. The receiving device includes a display for displaying the stream of images and an input device for marking the requested portion of the stream of images. The network is preferably an Internet Protocol network. Received frames within the stream of images are displayed at the receiving device while a remaining portion of the stream of images is transmitted. The receiving device further includes a received storage device for storing the stream of images. The requested portion of the stream of images is stored in the second

format and a remaining portion of the stream of images is stored in the first format at the received storage device.

In yet another aspect of the present invention, a system for transmitting a video stream of images from a source device to a receiving device includes a source device for generating the video stream of images, a transmitting device coupled to the source device to receive and store the video stream of images and a receiving device coupled to the transmitting device to receive the video stream of images in a first format, display the video stream of images for a user to mark one or more sections of interest, transmit a request for an enhanced version of the sections of interest and receive from the transmitting device the sections of interest within the video stream of images in a second format, wherein the second format represents an enhanced version of the first format. The source device is preferably a medical test device which is one of an ultrasound, a sonogram and an echocardiogram. The receiving device is coupled to the transmitting device through a network. The receiving device includes a display for displaying the stream of images and an input device for marking the requested portion of the stream of images. The receiving device further includes a received storage device for storing the video stream of images. The sections of interest within the video stream of images are stored in the second format and a remaining portion of the video stream of images is stored in the first format at the received storage device. Received frames within the video stream of images are displayed at the receiving device while a remaining portion of the video stream of images is transmitted.

In still another aspect of the present invention, a method of transmitting a video stream of images from a source to a receiving device for display and storage at the receiving device includes the steps of transmitting the video stream of images in a first format to the receiving device, displaying the video stream of images in the first format at the receiving device, allowing a user to mark sections of interest within the video stream of images and transmitting the sections of interest to the receiving device in a second format, wherein the second format represents an enhanced version of the first format. The method further includes the step of displaying the sections of interest in the second format at the receiving

device. The method further includes the step of storing the sections of interest in the second format and a remaining portion of the video stream of images in the first format at the receiving device. The step of transmitting the video stream of images and the step of displaying the video stream of images in the first format are performed simultaneously, such that a received portion of the video stream of images is displayed while a remaining portion of the video stream of images is transmitted. The step of displaying includes a fast-forward and rewind function. The method further includes the step of generating the video stream of images and transmitting the video stream of images to the source device. The step of generating is preferably performed by a medical test device which is one of a group of an ultrasound, sonogram and echocardiogram device.

BRIEF DESCRIPTION OF THE DRAWINGS:

Figure 1 illustrates a schematic block diagram of a typical configuration including a display device and an external image source coupled together through a network.

Figure 2 illustrates a block diagram of a video system according to the present invention for transmitting video images from one location to another.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:

The video system of the present invention includes a video source device, such as an ultrasound, sonogram or echocardiogram device, which generates video images. A transmitting device coupled to the video source device receives and stores the video images in collections or movies. The transmitting device is also configured to be coupled to a server and one or more receiving devices through a network for transmitting the captured movies. The transmitting device can either transmit the movies directly to a receiving device or to the server for storage. If stored at the server, a receiving device can access the server through the network to download a movie.

When downloaded from either the server or the transmitting device to a receiving device, the frames are first transmitted in a low-resolution, storage-efficient format. A user

can view received frames in the storage-efficient format, at the receiving device, as the remaining frames within the movie are being transmitted. The user can also mark sections of interest within the movie as they are viewing the movie. When the user then activates an enhance function, the frames within the marked sections of interest are sent from the server or transmitting device to the receiving device in an enhanced, high-resolution format for viewing by the user at the receiving device.

As frames are received at the receiving device, the data representing the frames is stored at the receiving device. If an enhanced, high-resolution version of a frame is received at the receiving device, the enhanced, high-resolution version of the frame is saved over the storage-efficient format of the frame which was previously received.

Figure 2 illustrates a video system 100 according to the present invention for transmitting video images from one location to another. The video system 100 preferably includes a video source 101, a video cassette recorder 102, a transmitter 103, a recorded video device 104, a computer network 105, a server 150, a plurality of receivers 106, and data links 110, 115, 120, 125 and 145. Preferably, the video source 101 includes the video cassette recorder 102 or other storage means, such as a hard disk or writable CD-Rom, and is coupled to the transmitter 103 via the data link 110. The data link 110 is preferably a Super-Video (S-Video) connection. The transmitter 103 is also preferably coupled to the recorded video device 104 and the computer network 105 via the data links 115 and 120, respectively.

Preferably, the server 150 is coupled to the computer network 105 through the datalink 145. Preferably, the plurality of receivers 106 are coupled to the computer network 105 via the data links 125. Each of the plurality of receivers 106 are preferably a computer system having a display, central processing unit, and input device. The data links 120, 125 and 145 preferably link each of the plurality of receivers 106 to the computer network 105. The data links 125 include any appropriate connection to the computer network 105 including T1 communication lines, DSL links, cellular links, microwave transmission, land lines, twisted pair cable, and the like. The video system 100 shown in Figure 2 is merely illustrative and is only meant to show the preferred embodiment of the present invention. In alternate

embodiments, additional servers, transmitters, video sources, and receivers could be included without departing from the spirit and scope of the video system 100.

The video source 101 preferably provides the video system 100 with at least one video image. The video source 101 is capable of providing either a real-time video image or a pre-recorded video image. For example, to provide a real-time video image, the video source 101 preferably includes a real-time input device 130. This real-time input device 130 is preferably a medical measurement device such as an ultrasound, sonogram and echocardiogram, and the like. Alternatively, this real-time input device 130 could be any other appropriate image capturing device including a video camera and a still camera. The pre-recorded video image is preferably provided by the storage device 102. Preferably, the storage device 102 is configured to record the real-time video images produced by the real-time input device 130 and play these pre-recorded video images at a later time. In addition to recording real-time video images and re-playing them, the video cassette recorder 102 is also preferably configured to accept and play a pre-recorded video cassette tape. The video source 101 is preferably configured to transfer the video image to the transmitter 103 via the data link 110.

The recorded video device 104 is preferably coupled to the transmitter 103 via the data link 115. Preferably, the recorded video device 104 stores video images received by the transmitter 103 for playback at a later time. The recorded video device 104 allows the transmitter 103 to distribute these video images to the server 150 and the plurality of receivers 106 at a later time. In addition, the recorded video device 104 also preferably serves as a mass storage device to store data that is unrelated to the video images.

The transmitter 103 preferably controls the flow of video images from both the video source 101 and the recorded video component 104 over the computer network 105 to any number of the plurality of receivers 106, directly, or to the server 150. The transmitter 103 preferably compresses the video images in any known format prior to transmission to one of

the plurality of receivers 106 or to the server 150. Further, the transmitter 103 preferably monitors and selectively establishes connections with the computer network 105 over the data link 120.

In the video system 100, the computer network 105 is preferably an Internet Protocol network. In alternate embodiments, the computer network 105 is any appropriate data network, including a direct connection. The computer network 105 is configured to transmit information between the server 150, the plurality of receivers 106 and the transmitter 103.

The plurality of receivers 106 are preferably configured to selectively receive a stream of video images from the transmitter 103 or from the server 150 over the computer network 105. For example, at least one of the plurality of receivers 106 is programmed to receive a stream of video images from the transmitter 103 or from the server 150. Accordingly, only the selected ones of the plurality of receivers 106 are capable of receiving the stream of video images from the transmitter 103 or from the server 150. In addition to receiving the stream of video images, the selected ones of the plurality of receivers 106 are also capable of transmitting instructions to the transmitter 103 or to the server 150 over the computer network 105.

The plurality of receivers 106 preferably reside in a remote location relative to the transmitter 103 and the server 150. Preferably, the plurality of receivers 106 selectively receive the flow of video images from the transmitter 103 or the server 150 and also selectively respond to the transmitter 103 or the server 150 with instructions.

Each of the plurality of receivers 106 preferably includes a video controller, a video client, and a video play device. Preferably, the video controller relays information regarding the frame size, frame rate, compression algorithm, and other parameters being transmitted to the transmitter 103 or to the server 150, as appropriate. Thus, a user interfacing with one of the plurality of receivers 106 is able to modify the frame size, frame rate, compression algorithm, and other parameters of the incoming stream of video images to one of the plurality of receivers 106. Since the plurality of receivers 106, the transmitter 103 and the server 150 are preferably located in remote locations, by interfacing with the video controller

of the receiver 106, the user is able to remotely control video parameters such as frame size, frame rate, compression algorithm, and the like which are included within the video settings at the transmitter 103 or the server 150.

5 The receiving device 106 preferably receives the compressed stream of video images from the server 150 or the transmitter 103. The video client within the receiving device 106 preferably includes a decompressor which is configured to decompress the compressed stream of video images to form a representation of the original, uncompressed stream of video images. After the compressed stream of video images is processed by the decompressor, the resulting stream of video images is ready to be displayed.

10 In operation, when transmitting directly to the receiving devices 106, the transmitter 103 acts as a server that is connected to an appropriate data network. For most movies captured by the transmitter 103, within the preferred embodiment of the present invention, the transmitter 103 will transmit the movies for storage at the server 150. The server 150 then will transmit the movies to the receiving devices 106, as appropriate, when the receiving devices 106 access the server 150 over the computer network 105.

15 Preferably, each of the plurality of receivers 106 individually acts as a stand-alone computer system connected to the data network. The server 150 selectively enables a data stream of video images to be transmitted to an appropriate one or more of the plurality of receivers 106. In order for a particular receiver 106 to receive the data stream of video
20 images from the transmitter 103, the receiver 106 logs onto the server 150 through the computer network 105. Preferably, the computer network 105 is the Internet Protocol network. Alternatively, the computer network 105 is any appropriate data network. Typically, in the preferred embodiment, this log on is accomplished by connecting through an Internet service provider. A connection between the server 150 and the particular receiver
25 106 is preferably established through the computer network 105 (Figure 1). The particular receiver 106 preferably communicates with the server 150 over the computer network 105 and furnishes a user identification, a password, or another form of identification and verification. Once the server 150 identifies the particular receiver 106 as an approved user, the server 150

allows the data stream of video images to be transmitted to the particular receiver 106 over the computer network 105. The transmitter 103 is capable of simultaneously transmitting the data stream of video images to multiple receivers 106, if appropriate.

When receiving a movie or recorded stream of video images from either a transmitter 103 or the server 150, utilizing the video system of the present invention, a receiving device 106 receives all or a selected portion of the movie in a storage-efficient format. This storage-efficient format allows a faster transmission of the movie from either a transmitter 103 or the server 150 to a receiving device 106, but provides the user a lesser quality video picture when displayed on the receiving device 106. The user then views the movie in this storage-efficient format in order to determine if there are portions of the movie that the user wants to see in an enhanced format. The user does not have to wait for the entire movie to be received, but can begin viewing the transmitted frames in the storage-efficient format as the remaining video frame data within the movie is being transmitted to the receiving device 106.

While viewing the movie in the storage-efficient format, the user can mark portions of the movie, referred to herein as sections of interest, to receive in an enhanced, high-resolution format. The receiving device 106 then transmits a request to the appropriate one of the transmitting device 103 or the server 150 to receive the frames within the marked sections of interest in an enhanced, high-resolution format. In response to this request, the transmitting device 103 or the server 150 transmits the frames within the marked sections of interest in the high-resolution format. The user can then view the frames within the sections of interest in this high-resolution format. The user can also begin viewing transmitted enhanced frames while the remaining enhanced frames within the section of interest are being transmitted.

If the request for enhanced frames within a section of interest occurs while the transfer of portions of the movie in the storage-efficient format is being completed, then the transfer of frames within the storage-efficient format is preferably interrupted until the enhanced frames are transferred. After the enhanced frames within the sections of interest have been transferred, the transfer of frames within the storage efficient format is then resumed from the point that it was interrupted.

The receiving device 106 also preferably stores a local copy of the movie that is received from either the transmitting device 103 or the server 150, including both the storage-efficient frames and the enhanced frames within the sections of interest. When enhanced frames within a section of interest are received the enhanced frames are stored over the corresponding previously received frames in the storage-efficient format. Accordingly, the local copy of the movie will include frames in the enhanced format in marked sections of interest and frames within the storage-efficient format in the remaining portions of the movie. A user can use controls such as play, pause, fast-forward, reverse-play, rewind, skip to next mark and skip to previous mark, to interactively control the portion of the movie that is currently being displayed at the receiving device 106.

Preferably, a transmitting device 103 or server 150, for transmitting video frames to a receiving device 106, includes an open function which establishes a connection between a receiving device 106 and a movie stored at the transmitting device 103 or the server 150. The transmitting device 103 or server 150 also includes a transfer frames function which transfers a specified range of frames within a movie, encoded using a specified encoding scheme, to the requesting receiving device 106.

Preferably, a receiving device 106 for receiving video frames from a transmitting device 103 or the server 150 includes an open function which requests a connection to a movie stored on the transmitting device 103 or the server 150. The receiving device 106 also includes a mark-in function, used to establish a beginning or in-point of a section of interest within a movie to be transferred, and a mark-out function, used to establish an end or out-point of the section of interest to be transferred. The receiving device 106 also includes an enhance function which is used to request from the transmitting device 103 or the server 150, an enhanced, high-resolution copy of the frames between the in-point mark and the out-point mark, denoting the section of interest previously established by the user. As discussed above, the receiving device 106 also includes transport control functions such as play, pause, fast-forward, reverse-play, rewind, skip to next mark and skip to previous mark, which are used to control the display of frames within the movie being displayed.

The receiving device 106 also includes a status display function which displays the status of each frame of the movie, as it is being displayed, as well as the current position of the player and the location of any flags or markers in the movie. The status of a frame is one of either transferred, specifying that the frame has already been transferred from the transmitting device, not-transferred, specifying that the frame has not yet been transferred from the transmitting device or enhanced, specifying that the enhanced, high-resolution version of the frame has been transferred from the transmitting device. The receiving device 106 also includes an accept frames function which accepts frames sent from the transmitting device 103 or the server 150 and stores them in a local copy of the movie which is built interactively. When the connection to the transmitting device 103 or the server 150 is eventually closed, the local movie stored at the receiving device 106 is a valid movie which may be replayed on the receiving device 106 at any time. In this stored local copy, if enhanced versions of frames were received, then the enhanced versions of frames are preferably saved to replace the previously received storage-efficient version of the frames. Alternatively, both versions of frames are saved in the local copy at the receiving device 106.

The storage-efficient format in which the video frames of a movie are first transmitted from the transmitting device 103 or the server 150 to the receiving device 106 is a low-resolution format which allows the video frames to be transmitted much faster between the transmitting device 103 or the server 150 and the receiving device 106. In the preferred embodiment of the present invention, the storage-efficient format requires 150 kbytes per second. The storage-efficient format is a trade-off between speed and quality. Frames in this format can be transferred faster than in the high-resolution format, but the quality of the frames, when displayed, is poorer, due to the lower resolution. However, preferably, the quality of frames in the storage-efficient format is good enough to allow the viewer to see the basic images within the frame and determine whether or not they would like an enhanced version of the frame.

The enhanced, high-resolution format in which marked sections of interest are transmitted from the transmitting device 103 or the server 150 to the receiving device 106

takes longer to transmit than frames within the storage-efficient format. However, when displayed, the quality of frames in the enhanced, high-resolution format is much greater than in the storage-efficient format. In the preferred embodiment of the present invention, the enhanced, high-resolution format requires 2.5 Mbytes per second.

5 Used together, the storage-efficient format and the enhanced, high-resolution format allow a user to quickly and effectively determine sections of interest within the movie where they would like to see frames in the enhanced format. The storage-efficient format allows the video frames within the movie to be transmitted to the receiving device 106 faster to give the user an opportunity to watch the movie at the receiving device 106 and determine and mark sections of interest within the movie. The frames between the marked sections of interest are then sent in the enhanced, high-resolution format and stored with the movie to replace the relevant frames. The user can view these enhanced, high-resolution frames within the sections of interest. In this manner, the entire movie is not sent in the enhanced format, but only the frames within the sections of interest. A local copy of the movie is stored at the receiving device 106 which includes the enhanced, high-resolution frames within the sections of interest, and frames in the storage-efficient format in the remaining portions of the movie.

10 In an alternate embodiment of the present invention, multiple levels of enhancement are utilized. In this embodiment, the system remembers the enhancement level of each frame which has been downloaded. When a user marks a section of interest, frames within that section are then transmitted at the next enhancement level. The user can keep enhancing the section of interest, as appropriate, until either the highest enhancement level is transmitted or the user is satisfied with the quality of the frame, as displayed.

15 In an alternate embodiment of the present invention, the system automatically enhances the current image or section of images. In this embodiment, if the user lingers on a particular frame or group of frames for more than a predetermined time period, then the system automatically transmits the enhanced, high-resolution version of the frame or group of frames.

20 In the preferred embodiment of the present invention, the frames within the movie are downloaded sequentially in the storage-efficient format. In an alternate embodiment of the

present invention, the system is not limited to a sequential download of the frames in the storage-efficient format. In this alternate embodiment, if the user sets the current position of the movie player to a point beyond all downloaded content, the system automatically begins downloading the frames at that chosen location in the movie in the storage-efficient format.

5 The system will then later return to the skipped portion of the movie and download the frames within that portion.

In an alternate embodiment of the present invention, a user can stop or pause the downloading of a movie from a transmitting device 106 or the server 150 to a receiving device 106 at any time. In this embodiment, the user can then later resume the downloading of the movie at the point at which the downloading was previously stopped and with all previously enhanced sections retaining their enhanced status and content.

In an alternate embodiment of the present invention, a user can add annotations to the movie stored at the receiving device 106 and have those annotations sent to the transmitting device 103 or the server 150, as appropriate, and stored in the original movie file. This allows a user to annotate a movie which others download and view with the annotations.

In operation, within the system of the preferred embodiment of the present invention, a user at a receiving device 106, selects a movie to be viewed from a list of movies available on a remote transmitter 103 or server 150. Once the selection is made, the receiving device 106 automatically makes a request to the transmitter 103 or the server 150 to transfer all frames within the movie in the storage-efficient format. The user can begin to playback and view the movie at the receiving device 106 as soon as any frames are received, while the remainder of the movie is being downloaded. As the user plays or positions through the movie, the user uses the mark-in and mark-out functions to mark sections of interest within the movie. The user can position through the movie using the fast-forward, reverse-play, rewind, skip to next mark and skip to previous mark functions. The user then uses the enhance function to request transfer of the frames within the marked sections of interest in an enhanced, high-resolution format from the transmitter 103 or the server 150. When received at the receiving device 106, the frames in the enhanced, high-resolution format are saved to

replace the previously received corresponding frame in the storage-efficient format. The user can begin to view the enhanced frames as soon as they are transferred and while the remainder of the enhanced frames are being transferred. If the request for enhanced frames occurred during the transfer of unenhanced frames, the transfer of unenhanced frames is interrupted until the enhanced frames are transferred, and then resumed after the transfer of enhanced frames is completed.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications may be made in the embodiment chosen for illustration without departing from the spirit and scope of the invention. Specifically, it should be apparent to those skilled in the art, that while the video system of the present invention is preferably used to transmit and display a video movie generated by a medical test device, the video system of the present invention can also be used to transmit and display any other type of video movie, image or series of images.

C L A I M S

We Claim:

1 1. A method of transmitting a video stream of images from a source device to a
2 receiving device comprising the steps of:

- 3 a. transmitting the video stream of images in a first format to the receiving
4 device;
5 b. receiving a request for an enhanced version of a marked portion of the video
6 stream of images from the receiving device; and
7 c. transmitting the marked portion of the video stream of images in a second
8 format, wherein the second format represents an enhanced version of the first
9 format.

1 2. The method as claimed in claim 1 further comprising the step of storing the
2 original video stream of images at the receiving device.

1 3. The method as claimed in claim 2 further comprising the step of storing the
2 marked portion of the video stream of images to replace a corresponding portion of the
3 original video stream of images.

1 4. The method as claimed in claim 1 further comprising the step of generating the
2 video stream of images and transmitting the video stream of images to the source device.

1 5. The method as claimed in claim 4 wherein the step of generating is performed
2 by a medical test device which is one of the group of an ultrasound, sonogram and
3 echocardiogram device.

1 6. The method as claimed in claim 1 further comprising the step of displaying the
2 video stream of images at the receiving device.

1 7. The method as claimed in claim 6 further comprising the step of marking the
2 marked portion of the video stream of images at the receiving device.

1 8. The method as claimed in claim 6 wherein the step of displaying includes a
2 fast-forward and rewind function.

1 9. The method as claimed in claim 6 wherein the step of transmitting the video
2 stream of images and the step of displaying are performed simultaneously such that a received
3 portion of the video stream of images is displayed while a remaining portion of the video
4 stream of images is transmitted.

1 10. The method as claimed in claim 1 further comprising the step of adding
2 annotations to the video stream of images.

1 11. The method as claimed in claim 1 further comprising the step of determining if
2 a user views a particular image within the video stream of images for a predetermined period
3 of time and automatically transmitting the particular image in the second format.

1 12. The method as claimed in claim 1 wherein if the request for an enhanced
2 version is received while the step of transmitting the video stream of images is being
3 performed, then the step of transmitting the video stream of images is paused while the step
4 of transmitting the marked portion is performed, and resumed once the step of transmitting
5 the marked portion is completed.

1 13. A transmitting device for transmitting a video stream of images to a receiving
2 device comprising:

- 3 a. a storage device configured for receiving and storing a stream of images; and
4 b. a controller coupled to the storage device and configured for coupling to the
5 receiving device for controlling transmission of the stream of images from the
6 storage device to the receiving device, wherein the stream of images are
7 transmitted to the receiving device in a first format and then a requested
8 portion of the stream of images are transmitted to the receiving device in a
9 second format, and further wherein the second format represents an enhanced
10 version of the first format.

1 14. The transmitting device as claimed in claim 13 further comprising a source
2 device coupled to the storage device for generating the stream of images and transmitting the
3 stream of images to the storage device.

1 15. The transmitting device as claimed in claim 14 wherein the source device is a
2 medical test device which is one of an ultrasound, a sonogram and an echocardiogram.

1 16. The transmitting device as claimed in claim 14 further comprising a network
2 interface circuit coupled to the storage device and to the controller for communicating with
3 the receiving device over a network.

1 17. The transmitting device as claimed in claim 16 wherein the receiving device
2 includes a display for displaying the stream of images and an input device for marking the
3 requested portion of the stream of images.

1 18. The transmitting device as claimed in claim 17 wherein the network is an
2 Internet Protocol network.

1 19. The transmitting device as claimed in claim 17 wherein received frames within
2 the stream of images are displayed at the receiving device while a remaining portion of the
3 stream of images is transmitted.

1 20. The transmitting device as claimed in claim 17 wherein the receiving device
2 further includes a received storage device for storing the stream of images.

1 21. The transmitting device as claimed in claim 20 wherein the requested portion of
2 the stream of images is stored in the second format and a remaining portion of the stream of
3 images is stored in the first format at the received storage device.

1 22. A system for transmitting a video stream of images from a source device to a
2 receiving device comprising:

- 3 a. a source device for generating the video stream of images;
- 4 b. a transmitting device coupled to the source device to receive and store the
5 video stream of images; and
- 6 c. a receiving device coupled to the transmitting device to receive the video
7 stream of images in a first format, display the video stream of images for a
8 user to mark one or more sections of interest, transmit a request for an
9 enhanced version of the sections of interest and receive from the transmitting
10 device the sections of interest within the video stream of images in a second
11 format, wherein the second format represents an enhanced version of the first
12 format.

1 23. The system as claimed in claim 22 wherein the source device is a medical test
2 device which is one of an ultrasound, a sonogram and an echocardiogram.

1 24. The system as claimed in claim 22 wherein the receiving device is coupled to
2 the transmitting device through a network.

1 25. The system as claimed in claim 22 wherein the receiving device includes a
2 display for displaying the stream of images and an input device for marking the requested
3 portion of the stream of images.

1 26. The system as claimed in claim 25 wherein the receiving device further
2 includes a received storage device for storing the video stream of images.

1 27. The system as claimed in claim 26 wherein the sections of interest within the
2 video stream of images are stored in the second format and a remaining portion of the video
3 stream of images is stored in the first format at the received storage device.

1 28. The system as claimed in claim 22 wherein received frames within the video
2 stream of images are displayed at the receiving device while a remaining portion of the video
3 stream of images is transmitted.

1 29. A method of transmitting a video stream of images from a source to a
2 receiving device for display and storage at the receiving device comprising the steps of:
3 a. transmitting the video stream of images in a first format to the receiving
4 device;
5 b. displaying the video stream of images in the first format at the receiving
6 device, allowing a user to mark sections of interest within the video stream of
7 images; and

- 8 c. transmitting the sections of interest to the receiving device in a second format,
9 wherein the second format represents an enhanced version of the first format.

1 30. The method as claimed in claim 29 further comprising the step of displaying
2 the sections of interest in the second format at the receiving device.

1 31. The method as claimed in claim 30 further comprising the step of storing the
2 sections of interest in the second format and a remaining portion of the video stream of
3 images in the first format at the receiving device.

1 32. The method as claimed in claim 31 wherein the step of transmitting the video
2 stream of images and the step of displaying the video stream of images in the first format are
3 performed simultaneously, such that a received portion of the video stream of images is
4 displayed while a remaining portion of the video stream of images is transmitted.

1 33. The method as claimed in claim 32 wherein the step of displaying includes a
2 fast-forward and rewind function.

1 34. The method as claimed in claim 29 further comprising the step of generating
2 the video stream of images and transmitting the video stream of images to the source device.

1 35. The method as claimed in claim 34 wherein the step of generating is performed
2 by a medical test device which is one of a group of an ultrasound, sonogram and
3 echocardiogram device.

ABSTRACT

A method of and apparatus for transmitting video images allows a viewer to receive at a receiving display device, all or a selected portion of a video stream of frames, in a storage-efficient format from a transmitting device and view the received video stream of frames before the transmission is complete. The video system also allows a viewer to receive at the receiving device, all or a selected portion of a video stream of frames, in a high-resolution format, by marking sections of interest within the received stream of frames in the storage-efficient format and requesting enhancement of those marked sections of interest. This apparatus preferably includes a source device, a transmitting device and at least one receiving device. Preferably, the transmitting device and the receiving device communicate over a network such as the Internet Protocol network. Alternatively, the transmitting device and the receiving device communicate over any appropriate data network. The transmitting device transmits the video images to the receiving device for display and storage at the receiving device. The receiving device is also capable of communicating with the transmitting device while simultaneously receiving video images. The source device is preferably a medical test device such as an ultrasound, a sonogram, an echocardiogram, and the like. Alternatively, the source device can be any video capture or storage device capable of sourcing a stream of video frames.

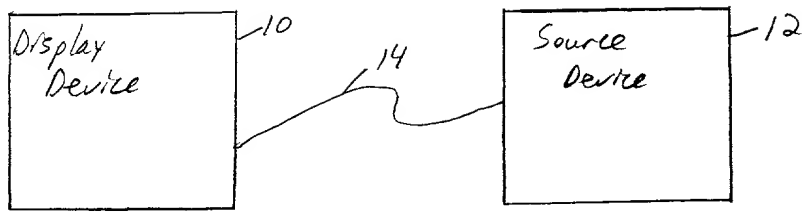


FIGURE 1

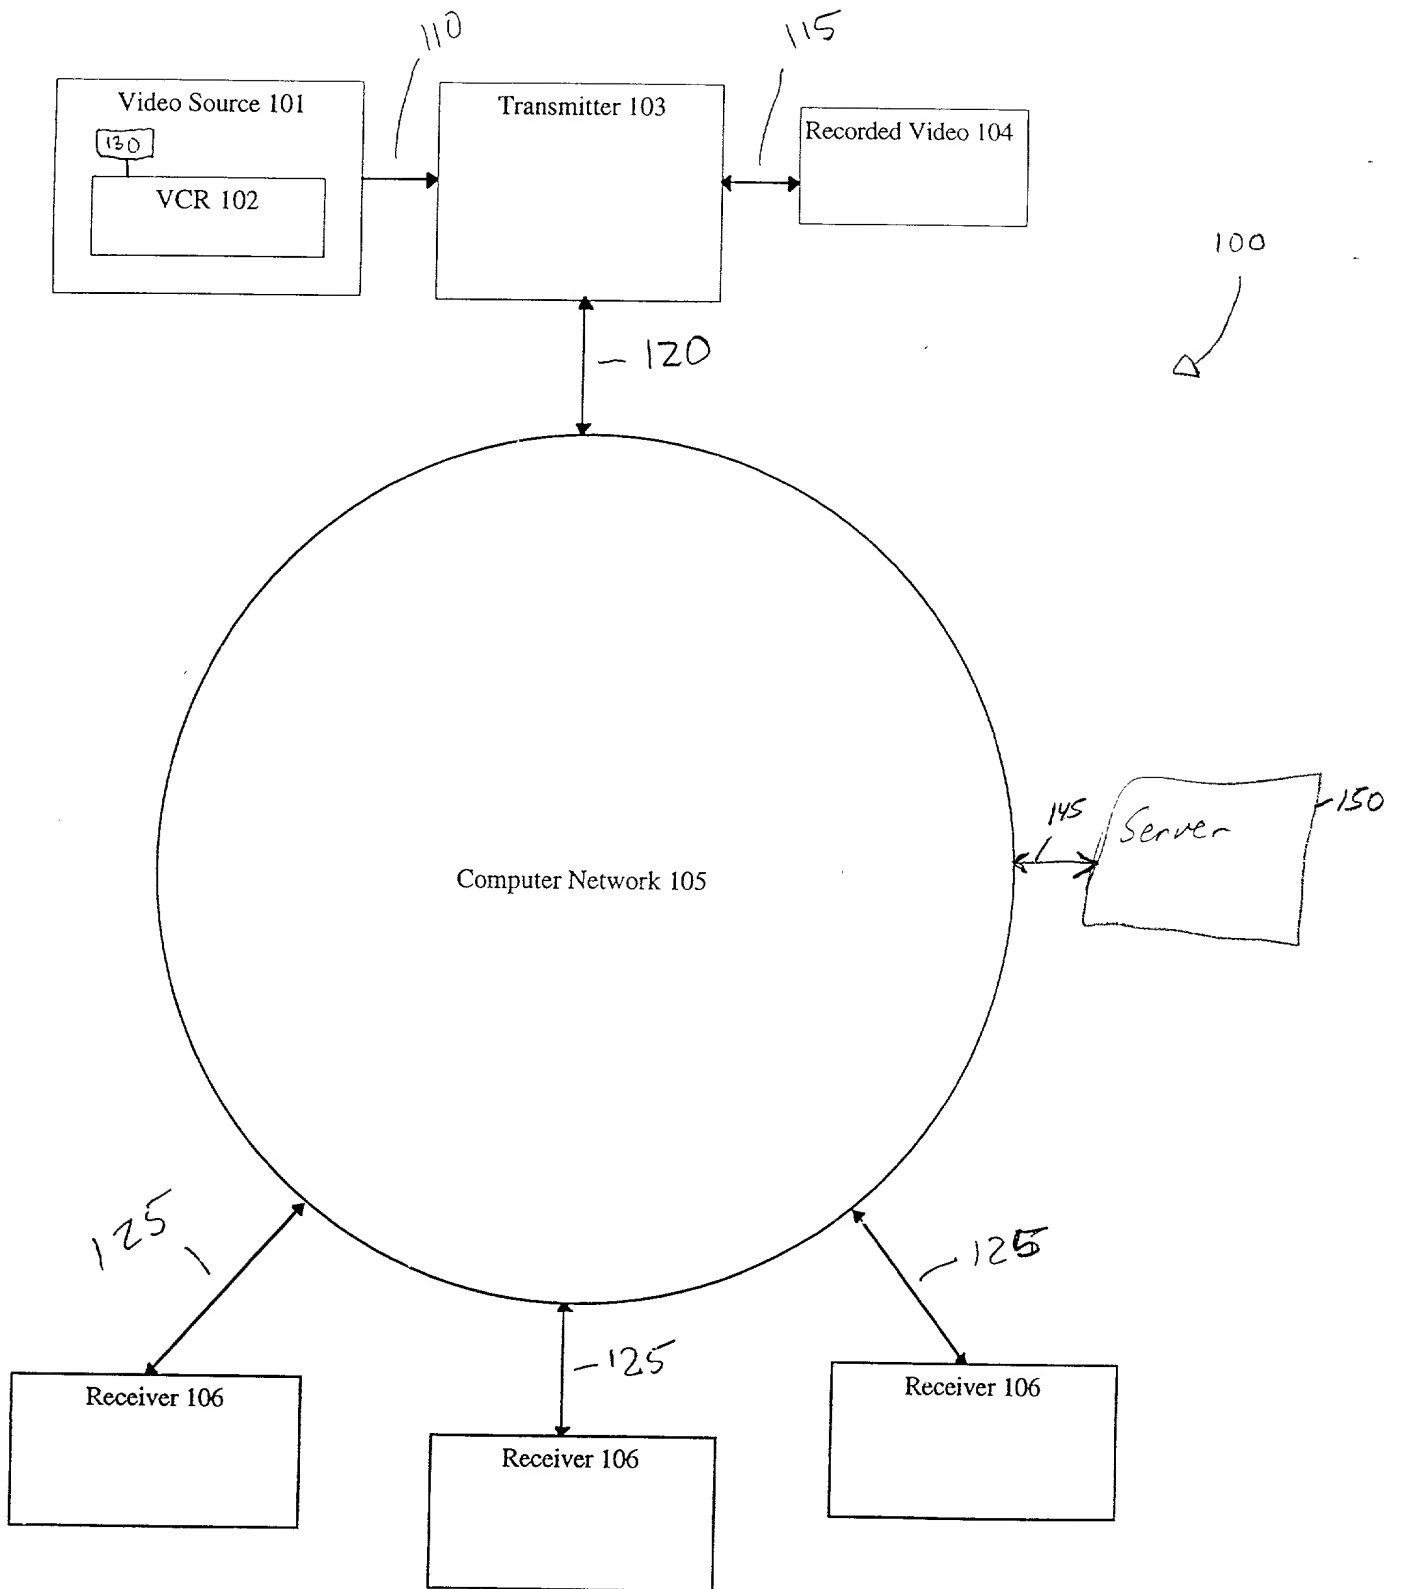


FIGURE 2

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name. I believe I am an original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A REMOTE RECEIVER**. The specification of which is attached hereto. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claim

Yes No

--	--

Number

Country

Day/Month/Year Filed

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Application Serial No.

Filing Date

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.

Filing Date

Status Patented, Pending, Abandoned

I hereby appoint the following as my attorneys with full power of substitution to prosecute this application and transact all business in the Patent and Trademark Office in connection therewith:

Thomas B. Haverstock

32,571

Jonathan O. Owens

37,902

Please direct all correspondence regarding this application to the following:

Jonathan O. Owens
HAVERSTOCK & OWENS LLP
260 Sheridan Avenue, Suite 420
Palo Alto, California 94306

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Sole Inventor: Carl P. Daniel

Inventor's Signature: _____

Date

Residence: 1273 Downieville Drive, El Dorado Hills, CA 95762

Citizenship: United States

Post Office Address: 1273 Downieville Drive, El Dorado Hills, CA 95762